

Part number:

HYDROMA
HYDRAULICKÉ SYSTÉMY

HIDROMA
SYSTEMS
UKŁADY HYDRAULICZNE

HYDROMA
ГИДРАВЛИЧЕСКИЕ СИСТЕМЫ

CBA-TM

AIR FILTERS

DESCRIPTION

Air breather, hand mounting

MATERIALS

Housing, flange and basket: zinc plated steel

Cap: chrome plated

Filter element ((not replaceable):

Impregnated cellulose 3µm (Filtration degree in air)

Polyurathan foam 10µm (Filtration degree in air)

COMPATIBLY (ISO 2943)


Full with fluids HH-HL-HM-HV-HTG (according to ISO 6743/4).

For fluids different than the above mentioned, please contact our Customer Service.

WORKING TEMPERATURE:

From -25°C to +110°C

HYDRAULIC DIAGRAM



Is this datasheet the latest release? Please check on our website.




CBA-TM

AIR FILTERS

ORDERING AND OPTION CHART

C	B	A	COMPLETE FILTER FAMILY	
			SIZE & LENGTH	11 21
	B		PORT TYPE	
		B = BSP thread	B	B
		PORT SIZE		
		02 = 1/4"	02	-
		06 = 3/4"	-	06
		FILTER MEDIA		
		CC = impregnated cellulose	CC	CC
		PE = polyurathan foam	PE	PE

INSTALLATION DRAWING

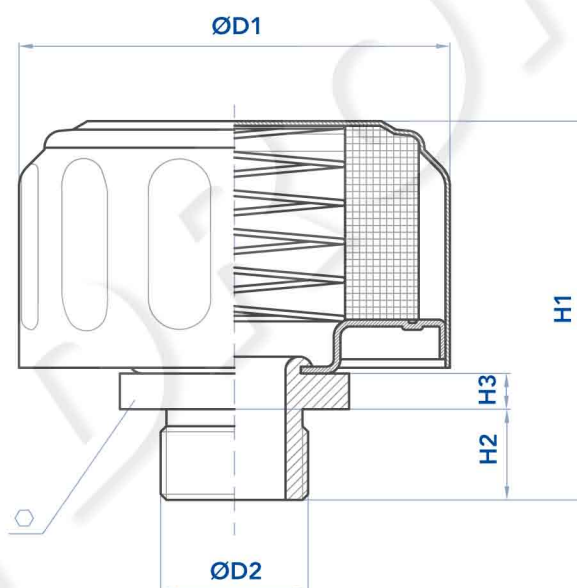

DIMENSIONS

	filtr. µm	flow rate (l/min)	D1	D2	⬡	H1	H2	H3
CBA11B02CC TM150B1	3	150	47	1/4" BPS	19	45	12	7
CBA11B02PE TM450B1	10	300	47	1/4" BPS	19	45	12	7
CBA21B06CC TM178B4	3	450	76	3/4" BSP	35	66	16	7
CBA21B06PE TM478B4	10	750	76	3/4" BSP	35	66	16	7