

Part number:

144-10010

HYDROMA


HYDRAULICKÉ SYSTÉMY

**HIDROMA
SISTEMS**

UKŁADY HYDRAULICZNE

HYDROMA

ГИДРАВЛИЧЕСКИЕ СИСТЕМЫ

Warning !
Sections of driveline marked  are not shielded and must be shielded by an interactive guarding system.
COMER spa declines responsibility if proper guards are not provided or maintained.

Notes:

CE CERTIFIED

End fittings

Max. torque

Tractor	Cod: C12	-
Implement	Cod: 112	-

Series:	T
Type:	80
Code:	07.825.013.10
Description:	T800760ENC12112
Customer's code:	-
Colour:	Yellow

Last drawing	
Index: -	Date: -

Application	-
-------------	---


Driveline data	
X	1 3/8" Z6 DIN 9611
Y	1 3/8" Z6 DIN 9611
E	570-22.44"
I	585-23.03"
P	500-19.69"

Overlap	
Steel tubes	Guard
Max.	535-21.06" 480-18.9"
Min.	215-8.46" 160-6.3"

Greasing point	
1)	-
2)	-

The dimensioning is cross to cross

Cross and tubes	
35	106.5
63x4	54x5

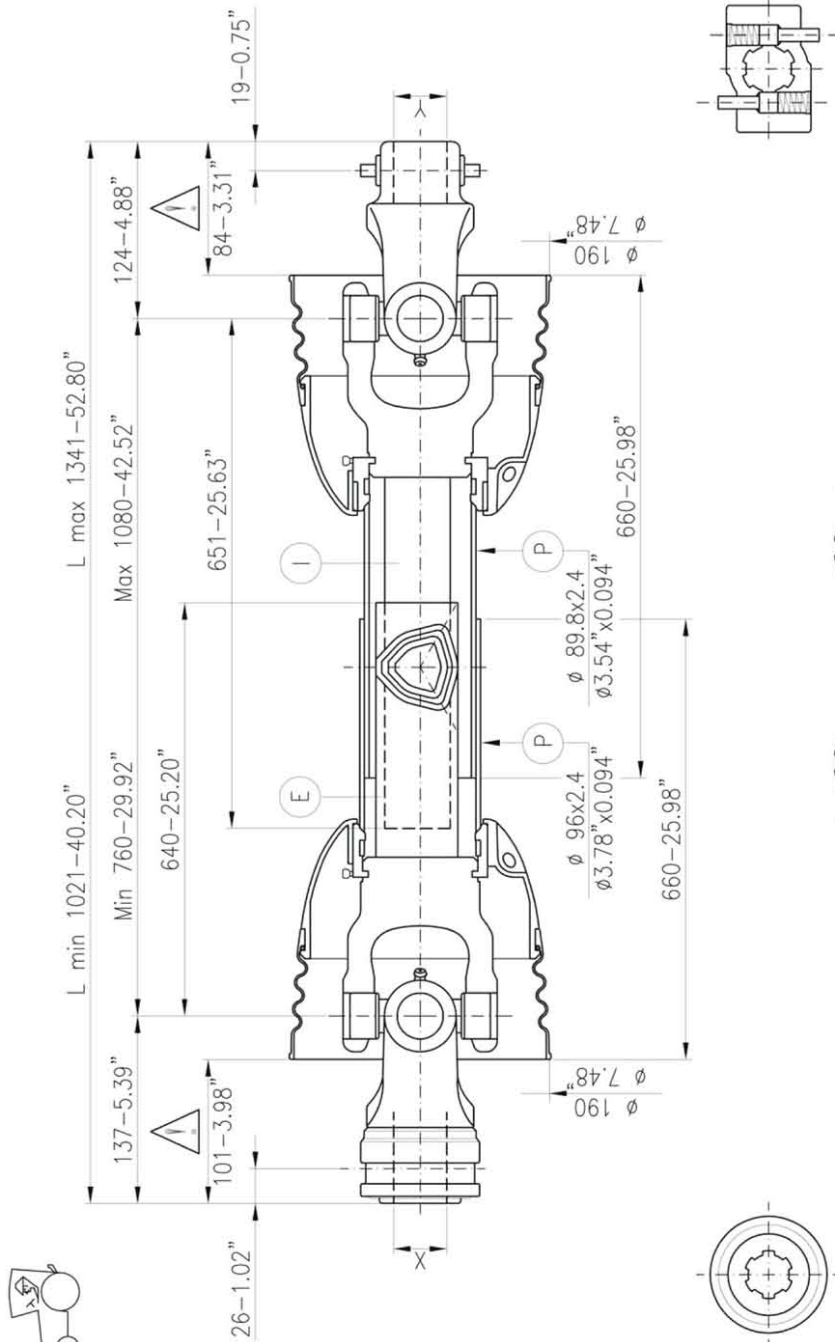

Data for critical velocity	
540 r.p.m.	1000 r.p.m.
Max.	Max.
L max.	L max.
Checked:	Signed by:

Data 1000 r.p.m.			
KW	CV	Nm.	in.lb.
110	150	1050	9300

Data 540 r.p.m.			
KW	CV	Nm.	in.lb.
70	95	1240	10950

Continuous operation data and conditions, working angle 5°, average life 1000 hours

Data for critical velocity	
540 r.p.m.	1000 r.p.m.
Max.	Max.
L max.	L max.
Checked:	Signed by:

Customer:
Date: