


Warning !
Sections of driveline marked  are not shielded and must be shielded by an interactive guarding system.
COMER spa declines responsibility if proper guards are not provided or maintained.

Notes:

CE CERTIFIED

End fittings **Max. torque**

Tractor	Cod: C12	Max. torque	-
Implement	Cod: 112	Max. torque	-

Series:	T
Type:	80
Code:	07.825.030.10
Description:	T801210ENC12112
Customer's code:	-
Colour:	Yellow

Last drawing

Index: - Date: -

Application

Driveline data

X	1 3/8" Z6 DIN 9611
Y	1 3/8" Z6 DIN 9611
E	1020-40.16"
I	1035-40.75"
P	950-37.4"


Overlap

Steel tubes	Guard
Max. 985-38.78"	930-36.61"
Min. 358-14.09"	303-11.93"

Greasing point

- 1) -
- 2) -

The dimensioning is cross to cross

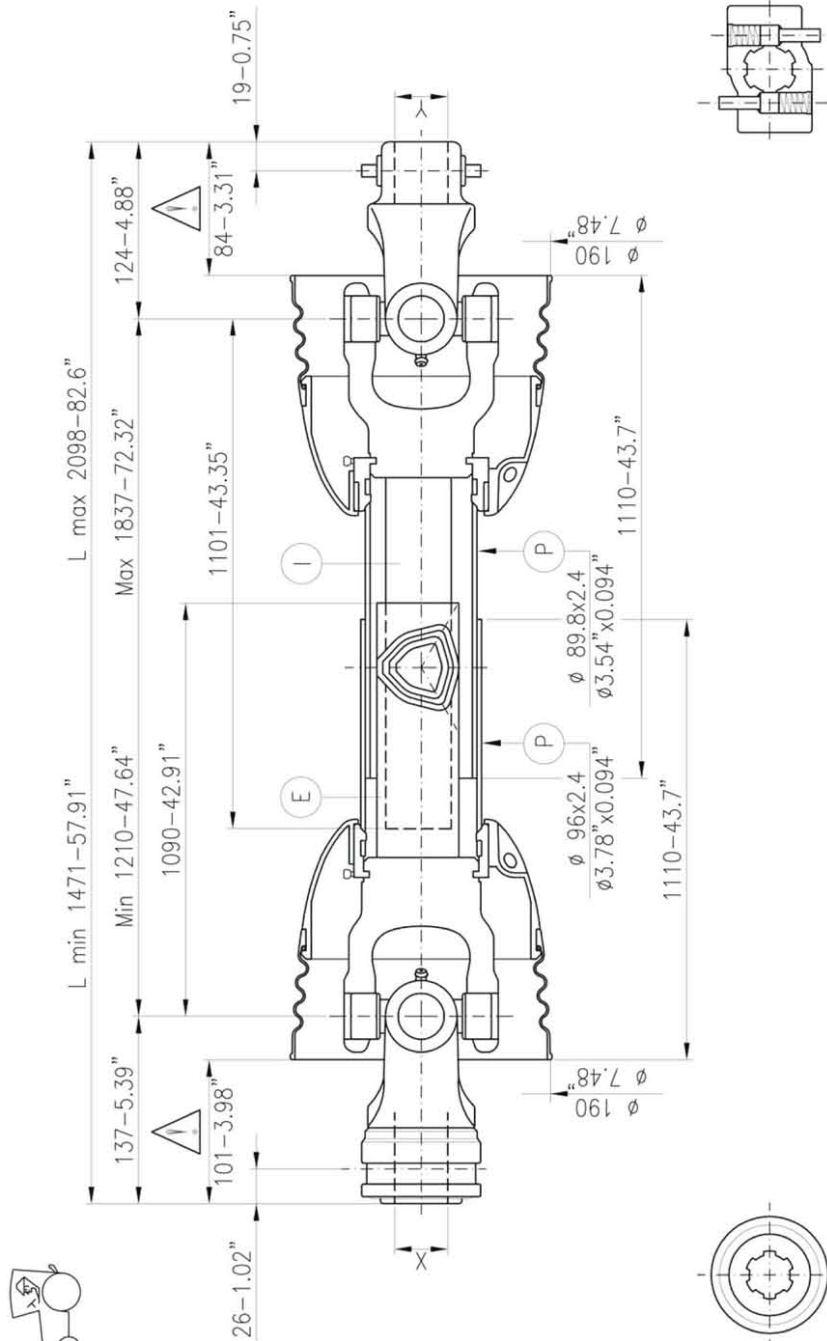

Customer:

Data for only critical velocity	
540 r.p.m.	1000 r.p.m.
Max. -	Max. -
L max. -	L max. -
Checked:	Signed by: P.S.
Date:	

Data 1000 r.p.m.		Data 540 r.p.m.	
KW	CV	Nm.	in.lb.
110	150	1050	9300
1100 min. r.p.m. max.		1100 min. r.p.m. max.	
+0.00		+0.00	

Continuous operation data and conditions, working angle 5°, average life 1000 hours

Cross and tubes

35	106.5	63x4
		54x5